

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 7/20	A1	(11) International Publication Number: WO 00/69186 (43) International Publication Date: 16 November 2000 (16.11.00)
<p>(21) International Application Number: PCT/SE00/00646</p> <p>(22) International Filing Date: 4 April 2000 (04.04.00)</p> <p>(30) Priority Data: 9901673-5 7 May 1999 (07.05.99) SE</p> <p>(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).</p> <p>(72) Inventors: SMOLENTZOV, André; Bergshamra Allé 145, S-170 77 Solna (SE). GRANBERG, Olof, Axel; Turevägen 6A, S-191 47 Sollentuna (SE). ALEXIUS, Staffan; Köpmannagatan 9, S-245 65 Hjärup (SE). DOVNER, Lars; Alingsåsvägen 11, S-857 34 Sundsvall (SE).</p> <p>(74) Agent: NORIN, Klas; Ericsson Radio Systems AB, Common Patent Department, S-164 80 Stockholm (SE).</p>	<p>(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: A COMMUNICATION SYSTEM

(57) Abstract

The present invention relates to methods and means for creating a cellular radio communication system (100) out of a number of local radio networks (109, 110), e.g. piconets. The local radio networks (109, 110) are unsynchronised with each other and uses a radio interface that has no broadcast channel, e.g. the Bluetooth radio interface. A control unit (108) is connected to each local radio network to provide the basic means and methods for a cellular radio communication system (100). Radio units (101-103) can attach and retain a connection to the control unit (108) via their respective radio node (104-107). The radio units (101-103) can also perform roaming, handover, measurements and fast connection set-ups in the system (100).

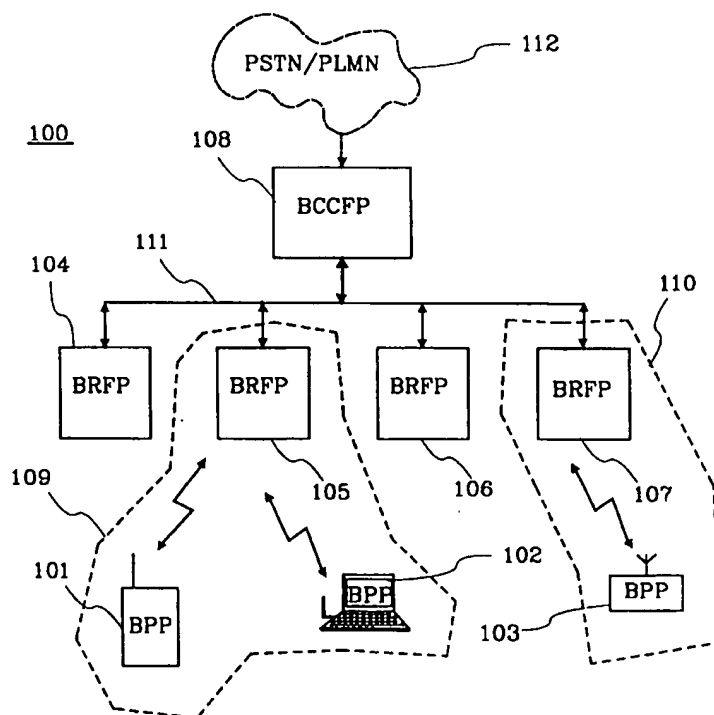

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A communication system**TECHNICAL FIELD OF THE INVENTION**

The present invention relates in general to the field of
5 radio communication and, in particular, to methods and means
for providing a cellular radio communication system
comprising a number of local radio networks utilising radio
interfaces that are unsynchronised with each other and have
no broadcast control channel.

10 DESCRIPTION OF RELATED ART

There are a number of equipments that have some sort of
radio communication means. By "radio unit" is meant all
portable and non-portable equipment intended for radio
communication with a radio communication system. Examples of
15 such radio units are mobile phones, cordless phones, pagers,
telex, electronic notebooks, PCs and laptops with integrated
radios, communicators, computers, wireless head sets,
wireless printers, wireless keyboards or any other
electronic equipment using a radio link as a mean of
20 communication. These equipments can be used with any type of
radio communication system, such as cellular networks,
satellite or small local radio networks. They can also
communicate directly with each other without using any
system.

25 Cellular radio communication systems are commonly employed
to provide voice and data communications to a plurality of
radio units or subscribers.

Examples of such cellular radio communication systems are
e.g. AMPS, D-AMPS, GSM, and IS-95 (CDMA). These systems
30 generally include a number of base stations serving portable
radio units, one or more base station controllers (BSC) and
at least one mobile switching centre (MSC) or similar. All
radio transmissions in the system are made via a specific

radio interface that enables radio communication between the portable radio units and the base stations.

The cellular radio communication system covers a certain geographical area. This area is typically divided into cells or regions. A cell typically includes a base station and the radio units with which the base station is in communication. The cell associated with the particular base station with which a radio unit is communicating is commonly called the serving cell.

To each cell one or more voice/data and/or traffic/control channels are allocated. Note that "channel" may refer to a specific carrier frequency in an analogue system, e.g. AMPS, a specific carrier/slot combination in a hybrid TDMA/FDMA system, e.g. GSM or one or more assigned codes in a DS-CDMA system.

The cellular radio communication system usually provides a broadcast channel on which all radio units can listen to system information from base stations or measure signal strength and/or signal quality at regular intervals. Such a channel is called Broadcast Control Channel in GSM and Page or Access Channel in D-AMPS.

The process of changing cells during a call is often called a handover or handoff. As soon as one of the neighbouring cells is considered to have a better signal strength/quality than the serving cell, e.g. by signal measurements on the broadcast channel, a handover is made to that particular neighbouring cell.

The ability to move around, changing cells and connections over the radio interface when the radio unit is switched on or is in some kind of stand by mode but not engaged in a call is called roaming. When the radio unit is roaming it listens to the broadcast channel for information about the

system e.g. in which specific area of the system the radio is presently located.

Today, a number of low-power, low-cost radio interfaces between radio units and their accessories are being developed. The intention is to replace the cables or infrared links, e.g. between a computer and a printer, with a short-range radio link (a wireless link) forming a local radio network.

A suitable frequency band for such a radio-interface is the 2,4 GHz ISM band (the Industrial-Scientific-Medical band) which ranges from 2,400-2,483 GHz in the US and Europe and from 2,471-2497 GHz in Japan. This frequency band is globally available, licence-free and open to any radio system.

There are some rules each radio system has to follow if they are to use this ISM band, e.g. in the ETSI standard ETS 300328. Synchronisation between different transmitters in a radio system using the ISM band is not allowed. Synchronisation is of course allowed between a transmitter and a receiver, e.g. when two radio units are communicating with each other. Another rule specifies that frequency spreading must be used for a radio interface using the ISM band. The IEEE 802.11 is an example of a specification utilising the ISM band.

An example of such a radio interface is called Bluetooth (see the Telecommunications Technology Journal "Ericsson Review", No. 3 1998, with the article "BLUETOOTH-The universal radio interface for ad hoc, wireless connectivity" by Jaap Haartsen). Bluetooth is an universal radio interface operating within the ISM band and enables portable electronic devices to connect and communicate wirelessly via short-range, ad hoc networks (local radio networks). Bluetooth uses a frequency-hop spread spectrum technique (FH-CDMA) where the frequency band is divided into several

hop channels. During a connection, radio units with Bluetooth transceivers hop from one channel to the other in a pseudo-random fashion. Each channel is divided into a number of slots in a time division multiplexing scheme, where a different hop frequency is used for each slot.

A radio unit with Bluetooth can simultaneously communicate with up to seven other radio units in a small local radio network called a piconet. Each piconet is established by a unique frequency-hopping channel, i.e. all radio units in a specific piconet share the same frequency hopping scheme. One radio unit acts as a master, controlling the traffic in the piconet, and the other radio units in the piconet act as slaves. Any radio unit can become a master, but only one master may exist in a piconet at any time (often the one that initiates the connection). It is often the radio unit that initiates the connection that acts as a master. Any radio unit may change its role from slave to master or vice versa (a slave to master or a master to slave switch). Every radio unit in the piconet uses the master identity and realtime clock to track the hopping channel. Hence the slaves must be informed of the identity and the clock of the master before they can communicate with the master.

Bluetooth supports both point-to-point (master to a slave) and point-to-multipoint (master to a number of slaves) connections. Two slaves can only communicate with each other through a master or by changing one of the slaves to a master with a slave to master switch.

There is no hop or time synchronisation between radio units in different piconets but all radio units participating in the same piconet are hop synchronised to one frequency-hopping channel and time synchronised so that they can transmit or receive at the right time. This does not contravene the rules of non synchronisation between transmitters in the ISM band because there is only one radio

unit that is transmitting at any time instant in the piconet.

A radio unit can act as a slave in several piconets. This is achieved by using the time division multiplexing scheme of the channels where e.g. a first piconet is visited in a first time slot and a second piconet is visited in a third time slot. There are three different time slots on each channel where each time slot is split in two portions, one portion for transmitting and one portion for receiving.

10 There is no broadcast channel (e.g. a Broadcast Control Channel in GSM) in Bluetooth to which radio units that are not connected to or have not been connected to a Bluetooth piconet can listen to system information, "find" a base station or to measure the signal strength/quality on.

15 As Bluetooth is designed to replace cables or infrared links between different electronic equipments no roaming or handover support have been incorporated in the radio interface. As soon as a radio unit connected to a piconet is moved outside the radio coverage of the master, the radio unit loses its connection (the call).

SUMMARY

A number of problems occur when local radio networks, utilising radio interfaces that are unsynchronised with each other and have no broadcast control channel, are to be connected into and used as a cellular radio communication system.

A radio unit that is switched on in a local radio network can not be attached to the system with the help of a broadcast channel.

30 A radio unit that has established a link to one local radio network can not reach or be reached from another local radio network.

A radio unit can not roam or perform handover to a new local radio network when it is moved outside the local radio network it was first connected to.

5 The system can not measure the signal strength/quality from and keep track of neighbouring local radio networks to be able to perform high quality roaming and handover.

A radio node/base station from one local radio network can not establish a link with a radio unit in a neighbouring local radio network.

10 In light of the foregoing, a primary object of the present invention is to provide methods and means for creating a cellular radio communication system out of a number of local radio networks, where each network utilises a radio interface that has no broadcast channel and is
15 unsynchronised compared to the other radio interfaces in the system. E.g. methods and means for attaching a radio unit to the system, retaining the connection to the system and providing measuring, roaming and handover capabilities.

20 According to a first aspect of the present invention there is a method for attaching a radio unit to a cellular radio communication system comprising a number of local radio networks utilising radio interfaces that are unsynchronised with each other.

25 According to a second aspect of the present invention there is a method for retaining a connection to a radio unit in a cellular radio communication system comprising a number of local radio networks utilising radio interfaces that are unsynchronised with each other.

30 According to a third aspect of the present invention there is a method for collecting data for a neighbouring list in a cellular radio communication system comprising a number of local radio networks utilising radio interfaces that are unsynchronised with each other.

According to a fourth aspect of the present invention there is a method for calculating the realtime clock of a first radio node in a second radio node in a cellular radio communication system comprising a number of local radio networks utilising radio interfaces that are unsynchronised with each other.

According to a fifth aspect of the present invention there is a method for co-ordinating the use of time slots in different local radio networks in a cellular radio communication system comprising a number of local radio networks utilising radio interfaces that are unsynchronised with each other.

A system according to the present invention comprises a control unit connected with a number of local radio networks and providing the basic means of a cellular radio communication system.

A control unit according to the present invention is connected with a number of local radio networks to provide the basic means for a cellular radio communication system.

An advantage with the present invention is that it is possible to attach and retain a radio unit that is switched on in the cellular radio communication system with no broadcast channel.

Another advantage is that it is possible to provide roaming and handover between local radio networks having radio interfaces that are unsynchronised with each other.

Still another advantage is that it is possible for a radio node in one local radio network to make a contact with a radio unit in another neighbouring local radio network.

Yet another advantage is that the signalling in the respective local radio network can be co-ordinated to facilitate inter local radio network communication.

Still another advantage is that it is possible for the system to keep track of neighbouring local radio networks to each radio unit.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is illustrating a block diagram of a first embodiment of a cellular radio communication system according to the present invention

- 5 Figure 2 is illustrating a flow chart of a first method according to the present invention.

Figure 3 is illustrating a flow chart of a first embodiment of a second method according to the present invention.

- 10 Figure 4 is illustrating an example of a BRFP_candidates list according to the present invention.

Figure 5 is illustrating an example of a neighbouring list according to the present invention.

Figure 6 is illustrating a flow chart of a second embodiment of the second method according to the present invention.

- 15 Figure 7 is illustrating a flow chart of a first embodiment of a third method according to the present invention.

Figures 8a-b are illustrating a block diagram of a paging scenario according to the present invention.

- 20 Figure 9 is illustrating a flow chart of a fourth method according to the present invention.

Figure 10 is illustrating a flow chart of a fifth method according to the present invention.

Figure 11a is illustrating uncoordinated timeslots in two local radio networks.

- 25 Figure 11b is illustrating co-ordinated time slots in two local radio networks according to the present invention.

Figure 12 is illustrating a block diagram of a second embodiment of a cellular radio communication system according to the present invention

5 Figure 13a is illustrating a schematic block diagram of a first embodiment of a control node according to the present invention.

Figure 13b is illustrating a schematic block diagram of a second embodiment of a control node according to the present invention.

10 Figure 14 is illustrating a schematic block diagram of a radio node according to the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

As previously stated, the present invention relates to a
15 cellular radio communication system comprising a number of local radio networks (piconets).

Figure 1 illustrates a block diagram of a first embodiment of a cellular radio communication system 100 for utilising
20 the present invention. The system 100 comprises a control-node (BCCFP) 108 connected to four radio-nodes (BRFP) 104-107 respectively. The BRFP 105 is serving two radio units (BPP) 101, 102 respectively and the BRFP 107 is serving a radio unit (BPP) 103. The BRFP 105 and the two BPPs 101, 102
25 respectively utilises a radio interface, to enable communication between them, and forms a first piconet 109 (a first local radio network). The BRFP 107 and the BPP 103 utilises the same radio interface and forms a second piconet 110 (a second local radio network). The radio interface used
30 in piconet 109 is not synchronised with the radio interface used in piconet 110.

The control-node 108 may be connected to a PSTN (Public Switched Telephone Network) and/or a PLMN (Public Land Mobile Network) as illustrated by the dashed cloud 112. The control-node 108 can also be connected to other control-nodes so as to form a bigger cellular radio communication system than illustrated in figure 1. This system 100 will be described in more detail at the end of this description.

Figure 2 illustrates a flow chart of a first method according to the present invention for attaching the BPP 101 to the cellular radio communication system 100 in figure 1. Attaching a BPP means that the cellular system becomes aware of that a new radio unit is switched on in the system, where in the system the new radio unit is located, if the new radio unit is authorised to use the system and to registrate the new radio unit in the system.

According to a step 201, the BPP 101 establishes a link with the BRFP 105 so that it becomes a part of the first piconet 109 in figure 1. The BPP scans for BRFPs within its radio coverage area, at regular intervals, by transmitting inquire signals (LC_INQUIRY) including the identity and the realtime clock of the BPP 101. The BRFPs in radio range answers by transmitting acknowledge signals (LC_FHS_{BRFP}) including their identity and realtime clocks to the BPP 101. The BPP 101 can then select one of these BRFPs, in this case BRFP 105, and transmit a page signal (LC_PAGE) to the selected BRFP and establish the link. The BPP 101 assumes the role as a master and the BRFP 105 takes the role as a slave. The BRFP 105 receives identification data from BPP 101, e.g. the IEEE-identity and/or if the radio unit 101 is equipped with a SIM-card the IMSI identity. The BRFP 105 also receives information regarding the class of service provided by the BPP 101, authentication, and as previously stated the realtime_clock of the BPP 101 which is needed to calculate the frequency hopping sequence in the BRFP 105.

The BPP 101 makes the first contact, by the LC_INQUIRY, with the BRFP 105 before it can detect any signal from the BRFP 105. The BRFP 105 needs to know at least the identity of the BPP 101 (received by the LC INQUIRY) to be able to
5 transmit a signal that the BPP 101 can detect. This is because that there is no broadcast control channel in the radio interface utilised in the system 100.

According to a step 202, the BRFP 105 performs a Bluetooth authentication (LMP_Bluetooth_Authentication). This is
10 performed between the Bluetooth circuits in the BRFP 105 and the BPP 101 in a known way.

According to step 203, the BRFP 105 forwards the information and the identification data received in step 201 to the BCCFP 108.

15 According to step 204, the BCCFP 108 identifies the BPP 101 by the identification data.

According to step 205, the BCCFP 108 authenticates the BPP 101. As an example, the known authentication technique used in GSM can be used for this authentication. The IEEE
20 identity with additional authentication information can also be used.

According to step 206, the BCCFP 108 registers the identity of the BPP 101 in the system. This means that the BPP 101 has established a connection with the system 100 and is
25 ready to receive incoming calls etc.

According to a step 207, the BRFP 105 initiates a Master-Slave switch so that the BRFP 105 becomes the master and the BPP 101 becomes the slave.

According to step 208, the BRFP 105 puts the BPP 101 in a
30 parked mode by transmitting a park command. This means that the BPP 101 will terminate the link to the BRFP 105 but still be active and listen for signals from the BRFP 105

(the master) so that it can retain the link to the BRFP 105 again. This means that if the maximum number of BPPs in a piconet is 7 and the BPP 101 was the 7th one a new BPP may be able to connect to the piconet after the BPP 101 is put
5 in the parked mode.

Figure 3 illustrates a flow chart of a second method according to the present invention for retaining the connection to the BPP 101 in the cellular radio communication system 100 in figure 1 after the BPP 101 has
10 been attached to the system.

According to a step 301, the BRFP 105 (the master) establishes a beacon signalling to the BPP 101 (the slave) at evenly spaced time instants (beacon intervals). This means that the BPP 101 receives signals from the BRFP 105
15 at the beacon intervals.

This beacon signal can as an example comprise parameters that activates a parked slave (e.g. a channel access code for the BPP 101), re-synchronises parked slaves or allows certain slaves to access the channel. This signal can as an
20 alternative also include information regarding how busy the BRFP 105 is. The beacon signal is transmitted to a number of specific radio units, in this case the BPP 101, and not to all radio units within radio range of the radio node as with a broadcast channel. The beacon signal is intended as
25 a means for a master to retain the link to slaves that are not active in any transmissions and if needed to activate parked slaves (see step 208 above).

If, according to a step 302, the BPP 101 is in a parked mode the method continues with step 303, otherwise it
30 continues with step 304.

According to a step 303, the BRFP 105 activates the parked BPP 101 by transmitting a page with the identity of the BPP 101. This can be made at evenly spaced time instants.

According to a step 304, the BPP 101 measures a signal parameter, e.g. the signal quality or signal strength, on the beacon signal from BRFP 105. The BPP 101 transmits this measurement to the BRFP 105 in a result signal.

- 5 According to a step 305, the BRFP 105 measures the signal parameter on one or more signals from the BPP 101, e.g. the result signal in step 304. The BRFP 105 forwards the measurements in step 304 and 305 to the BCCFP 108 which stores them in a BRFP_candidates list. See figure 4 which
10 illustrates an example of such a list. The BRFP 105 puts the BPP 101 in parked mode again if the BPP 101 where in a parked mode in step 302.

- According to step 306, the BCCFP 108 checks if there is a neighbouring list for the BRFP 105 stored in the BCCFP. If
15 not, the method continues with step 701 according to figure 7 for creating such a list. The neighbouring list for BRFP 105 comprises information of which additional BRFPs in the system that a BPP connected to BRFP 105 in piconet 109 should be able to hear. Figure 5 shows an example of such a
20 neighbouring list for BRFP 105 where BRFP 104 and 106 are listed as neighbours.

- According to step 307, the BCCFP 108 orders the BRFPs 104 and 106 in the neighbouring list to page the BPP 101, activate the BPP if needed, establish a beacon signalling
25 and perform measurements according to step 301-305. If a BRFP on the neighbouring list is unable to establish a link to the BPP 101 (the BPP 101 may temporarily be out of reach) it will continue to page the BPP 101 as long as the BPP 101 remains in the piconet 109 associated with the BRFP
30 105. The BRFPs 104 and 106 on the neighbouring list can page (reach) the BPP 101 thanks to the BCCFP 108 which distributes the identity of the BPP 101 to the BRFPs.

The three BRFP 104, 105 and 106 respectively will now have beacon signalling ongoing with the BPP 101. The BRFP 104,

106 respectively will measure one or more signal parameters, e.g. the signal quality and/or signal strength, from the BPP 101 whenever they have free capacity for that. As an alternative, if the BPP 101 is in a parked mode, one BRFP, 5 e.g. BRFP 105, can activate the BPP 101, receive measurements from the BPP and deactivate the BPP within a short interval and the other BRFPs, e.g. BRFP 104 and 106, can do the same but within a longer interval to reduce the signalling within the system. If this is the case, the BPP 10 may perform measurements on the BRFPs 104 and 106 at the same time as on the BRFP 105 and transmit these measurements to the BRFP 105 at the shorter intervals.

Figure 6 illustrates a flow chart of a second embodiment of the second method where the measurements in step 304 and 15 305 are made during an ongoing call. This means that step 304 and 305 according to figure 3 may be replaced by the following steps.

According to a step 601, the BRFP 105 transmits information 20 to the BCCFP 108 regarding the exact clock information and hop sequence used for the call/link to the BPP 101.

According to a step 602, the BCCFP 108 forwards the information received in step 601 to the BRFP 104 and 106, i.e. to all additional BRFPs on the neighbouring list for 25 BRFP 105.

According to a step 603, the BRFP 104 and 106 measures the signal strength and/or signal quality on the ongoing call between the BRFP 105 and the BPP 101, e.g. in a separate receiver in the BRFPs dedicated for monitoring (e.g. 30 measuring).

According to a step 604, the BRFP 104 and 106 transmits the measured signal strength and/or signal quality to the BCCFP 108 which stores these measurements in the BRFP_candidates list for the BRFP 105.

The steps 601-604 may in a third embodiment of the second method (not illustrated) be used as a complement to step 304 and 305 instead of replacing them. This means that steps 601-604 are performed after step 607 in figure 3.

- 5 If the link between the BPP 101 and the BRFP 105 becomes bad the second method may continue to perform roaming as described below (not illustrated in any flow charts).

The link roams from BRFP 105 to BRFP 104 that, according to the BRFP_candidates list for BRFP 105, has the best signal
10 strength and/or signal quality for the moment (see figure 4). This means that the BCCFP 108 selects the new BRFP for roaming with the help of the BRFP_candidates list. This selection may as an alternative or as a complement be made on free capacity in the neighbouring BRFPs.

- 15 If the BPP 101 does not respond to any signalling from the BRFP 104, e.g. a page signal, the second method may end by unregister the BPP 101 as described below (not illustrated in any flow chart).

The BRFP 104 transmits an unregistered message (UNREG) to
20 the BCCFP 108 regarding a link loss to the BPP 101.

The BCCFP 108 controls if any other BRFP, e.g. BRFP 105 and 106, have an ongoing beacon signalling to the BPP 101. This is made e.g. by checking the BRFPs on the neighbouring list. The BCCFP 108 unregisters the BPP 101 in the system
25 (all links lost to BPP 101) if no BRFP in the system has an ongoing beacon signalling to the BPP 101.

If a system initiated handover is to be performed, the second method may continue with a handover as described below (not illustrated).

- 30 The BCCFP 108 selects a new BRFP from the neighbouring list of the BRFP 104 and orders the selected BRFP, e.g. the BRFP 105, to initiate a handover.

If a BPP initiated handover is to be performed, the second method may continue with a handover as described below (not illustrated).

5 The BPP 101 establishes a new link with the BRFP 105 which, according to the BRFP_candidates list for BPP 101, has the highest signal strength and/or signal quality.

The BRFP 105 orders the BCCFP 108 to route the call to the BRFP 105. Hence both BRFP 104, 105 respectively are connected to the BPP 101 for a short moment.

10 The BRFP 105 initiates a termination of the link from the BRFP 104 to the BPP 101 when the new link is established. This is made via the BCCFP 108.

Figure 7 illustrates a flow chart of a third method according to the present invention for collecting data for a
15 neighbouring list for the respective BRFP in the system used e.g. in the second method above. The collected data is used for creating and updating the neighbouring lists for the respective BRFP. As previously been stated, the neighbouring list for the BRFP 105 comprises information of which
20 additional BRFPs in the system that the BPP 101 in piconet 109 can hear. This can e.g. be performed when a new system is run for the first time, when new BRFPs are added to the system, at specified intervals, or when one or several BRFPs are moved to a new location within the system.

25 According to a step 701, all BRFPs in the system 100 transmits a page signal (LC_PAGE) to the BPP 101, see figure 8a. The BRFPs have been given the identity of the BPP 101 from the BCCFP 108 which also may initiate this step.

30 According to a step 702, the BPP 101 transmits a response-signal (BRFP_same_time list) to the BRFP 105. The response-signal comprises information regarding which BRFP the BPP 101 can hear (e.g. detected a page signal from) at the same

time and, as an alternative, also the signal strength on the detected page signal (LC_PAGE). This response signal may be transmitted each time a new BRFP has established beacon signalling with the BPP 101 (e.g. in step 307).

- 5 According to a step 703, the BRFP 105 forwards the information received in step 702 to the BCCFP 108. The BCCFP 108 collects this information and creates the neighbouring list for the BRFP 105 by registering the BRFPs (except the BRFP 105) that the BPP 101 have heard in step 702 as
10 neighbours to the BRFP 105 or if such a list already exists updates the neighbouring list accordingly. This can as an example be made by adding "new" neighbouring BRFPs, included in the response signal (BRFP_same_time list) but not registered in the neighbouring list, and deleting
15 "old" neighbouring BRFPs, registered in the neighbouring list but not included in the response signal. A delay may be used for the deletion of BRFPs in the neighbouring list to avoid deletion of BRFPs that are just temporarily out of reach for the page. As an example, a certain BRFP on the
20 list must be excluded from two or more consecutive response signals received according to step 702 before being removed from the neighbouring list.

The BCCFP 108 can now direct signals to the BRFP serving a specific BPP in the system and its neighbouring BRFPs, e.g.
25 for page signals, with the help of the neighbouring list which reduce the signalling within the system as seen in figure 8b. This improves the performance of the system.

Figure 9 illustrates a flow chart of a fourth method according to the present invention where the realtime clock
30 of a BRFP in one piconet is calculated by a BRFP in another piconet, e.g. the realtime clock of BRFP 105 is calculated by the BRFP 106, see figure 1. This method is preferably performed when more than one BRFP (from different piconets) have established a link with one and the same BPP. In the

steps below both the BRFP 105 and the BRFP 106 in the system 100 have established a link with the BPP 102.

According to a step 901, the BRFP 105 calculates a first
realtime_clock difference value ($\Delta 1_CLOCK$) between the BPP
5 102 and its own realtime_clock ($clock_BPP_{102} - clock_BRFP_{105}$).

According to a step 902, the BRFP 105 transmits the
calculated $\Delta 1_CLOCK$ value to the BCCFP 108 which stores it
in a sync-list or as an alternative in the neighbouring
list.

10 According to a step 903, the BRFP 106 calculates a second
realtime_clock difference value ($\Delta 2_CLOCK$) between the BPP
102 and its own clock ($Clock_BPP_{102} - Clock_BRFP_{106}$).

According to a step 904, the BRFP 106 transmits the
calculated $\Delta 2_CLOCK$ value to the BCCFP 108 which stores it
15 in the sync-list. As an alternative, the BCCFP 108 can
distribute $\Delta 1_CLOCK$ and $\Delta 2_CLOCK$ values to the BRFPs 104,
106 and 107.

According to step 905, the BCCFP 108 calculates the
BRFP_realtime_clock difference value ($\Delta 3_CLOCK$) between the
20 BRFP 106 and the BRFP 105 ($Clock_BRFP_{106} - Clock_BRFP_{105}$)
according to the following equation:

$$\begin{aligned}\Delta 3_CLOCK &= \Delta 1_CLOCK - \Delta 2_CLOCK = [Clock_BPP_{102} - Clock_BRFP_{105}] \\ &- [Clock_BPP_{102} - Clock_BRFP_{106}] = - Clock_BRFP_{105} + Clock_BRFP_{106} \\ &= Clock_BRFP_{106} - Clock_BRFP_{105}\end{aligned}$$

25 The $\Delta 3_CLOCK$ value is stored in the sync-list.

If, according to a step 906, the BCCFP wants the BRFP 106 to
establish a link to the BPP 101 in the neighbouring piconet
109, e.g. establish beacon signalling according to step
305, the method continues with step 907 below, otherwise it
30 ends.

According to step 907, the BCCFP 108 transmits the $\Delta 3_CLOCK$ value to the BRFP 106 and orders the BRFP 106 to transmit an LC_PAGE to the BPP 101.

5 According to a step 908, the BRFP 106 calculates the realtime clock of the BRFP 105 (Clock_BRFP₁₀₅) to which the BPP 101 is listening, e.g. during park or active mode.

Every BPP in a piconet uses the master clock (e.g. a BRFP clock) to track the common hopping channel in the piconet when the BPPs have assumed the roles as slaves. Hence if the
10 master clock in a current piconet is known, the BPP in the current piconet can be easily reached from other BRFPs or BPPs outside the current piconet as long as they are within radio reach. The Clock_BRFP₁₀₅ is calculated according to the following equation:

$$15 \quad \text{Clock_BRFP}_{105} = \Delta 3_CLOCK - \text{Clock_BRFP}_{106} = \text{Clock_BRFP}_{106} - \text{Clock_BRFP}_{105} - \text{Clock_BRFP}_{106} = \text{Clock_BRFP}_{105}$$

According to step 909, the BRFP 106 transmits an LC_PAGE to the BPP 101 and establishes a new link and a new piconet with the BPP 101.

20 The calculation in step 905 can as an alternative be made in the BRFP 106 as well as the calculation in step 908 if the BCCFP 108 transmits the information regarding the BRFP_realtime differences that is stored in the sync-list to the BRFP 106.

25 In short, all the BRFPs in the cellular radio communication system calculates the realtime_clock differences between the BPPs they are connected to and their own realtime clocks. The BRFPs transmits the realtime_clock differences to the BCCFP 108 where they are used for calculating the
30 BRFP_realtime_clock differences between each BRFP in the system. A first BRFP associated with a first piconet can then page a second BPP in a second piconet (e.g. to establish a new piconet) very accurately and quickly with

the help of the BRFP realtime_clock difference as described in step 908.

Figure 10 illustrates a flow chart of a fifth method according to the present invention for co-ordinating the use of timeslots in each piconet associated with the cellular radio communication system. This method is preferably performed when a call is in progress on a link in a piconet and hence one available time slot is occupied.

According to a step 1001, the BRFPs 104-107 in the system 100 calculates the realtime_clock differences between the BPPs they are connected to and their own realtime clocks as in step 901 and 903 according to figure 9.

According to a step 1002, the BRFPs 104-107 transmits the calculated realtime_clock differences to the BCCFP 108, as in step 902 and 904 according to figure 9.

According to a step 1003, the BCCFP 108 calculates the BRFP_realtime_clock differences between the BRFP 104-107, as in step 905 according to figure 9, from the realtime_clock differences received in step 1002.

According to a step 1004, the BCCFP 108 selects the realtime_clock of BRFP 104 as a reference clock (ref_clock) for all piconets in the system 100. This can as an example be made by giving the first slot from BRFP 104 the time value 0 whereby the other BRFPs are given an offset value according to their BRFP_realtime_clock difference with BRFP 104 which are e.g. added to or subtracted from their own realtime clocks.

According to a step 1005, the BCCFP 108 orders all BRFPs in the system 100 to use, as long as possible, a time slot co-ordinated with the ref_clock for signalling and payload to their respective BPP.

This means that the signalling in the system 100 can be made more effective by increasing the probabilities of a fast connection set-up between BPPs and BRFP in different piconets, since blocked time slots (blind_spots) will be more rare. Further on the total system capacity will increase.

Figure 11a illustrates uncoordinated traffic and signalling in piconet 109 and 107 in system 100. There are three timeslots, each with a transmit portion and a receive portion, on the hopping channel in each piconet that the BPPs and BRFPs can use. BRFP 105 and BPP 101 communicates on the first timeslot and BRFP 105 and BPP 102 communicates on the second timeslot in piconet 109, which means that the third timeslot in piconet 109 is free. BRFP 107 and BPP 103 communicates on the third timeslot in piconet 110, which means that the first and second timeslot in piconet 110 are free. If BRFP 107 wants to page BPP 102 in piconet 109, the BRFP 107 has to use the first or second timeslot in piconet 110 (the free ones) but the corresponding timeslots in piconet 109 are not free. This means that the BRFP 107 can not reach the BPP 102 right now and have to wait until the communication on the first or second timeslot in piconet 109 stops. Hence two blind_spots 1101 and 1102 have occurred.

Figure 11b illustrates the same traffic and signalling as in figure 11a but co-ordinated according to the fifth method (figure 10). The realtime clock of the BRFP 105 is selected as the ref_clock and the BRFP 107 has co-ordinated its traffic to BPP 103 accordingly so that the BPP 102 can be reached by a page P from the BRFP 107 in the third timeslot. The third timeslot in BPP 102 is synchronised with the third timeslot in BRFP 107 by introducing a small pause 1103 between the second and third timeslot in BPP 102. This means that a part of the space where the next timeslot in BPP 102 (the first one due to the three time slot scheme) where to be put is used for the third timeslot. The first

timeslot can therefore not be used for the moment. As seen in figure 11b the BRFPs in the respective piconet are still not synchronised to each other.

The inventive methods according to figure 2, 3, 6, 7, 9 and 10 can be completely or partially implemented as software in at least one microprocessor.

As previously been described, figure 1 illustrates a block diagram of a first embodiment of a cellular radio communication system 100 for utilising the present invention. The BRFPs in figure 1 are connected to the BCCFP 108 via a local area network (LAN) 111.

Figure 12 illustrates an alternative connection where each BRFP is circuit switched connected to a switch 1201, preferably arranged in the BCCFP 108, via dedicated transmission lines. The BRFPs can as another alternative be connected to the BCCFP 108 via one or more radio links, e.g. a radio-LAN or wireless-LAN (WLAN).

Each BRFP and BPP comprises at least one Bluetooth circuit/chip for utilising the radio communication over the Bluetooth radio interface. The Bluetooth radio interface is one example of a radio interface utilised in small short range local radio network. Other radio interfaces with similar characteristics may also be used.

The system 100 can as an example be an indoor cellular radio communication system where the first piconet 109 is situated in a first room and the second piconet 110 is situated in a second room. The BRFPs 105 and 107 can as an example be personal computers (PCs) with means for radio communication and connected to the LAN 111. The BPP 101 can as an example be a cordless phone, the BPP 102 a laptop with means for radio communication and the BPP 103 a printer with means for radio communication. The BRFP 106 may be a phone situated in a third room and connected to

the LAN by wire. If the BPP 101 is moved to the third room the BRFP 106 and the BPP 101 establishes a connection and hence forms a new (third) piconet.

5 A complete cellular radio communication system needs to have some basic functionality's to work and reach an acceptable system behaviour. Those are described in the methods according to figure 2, 3, 6, 7, 9 and 10.

10 All these basic functionality's are provided in the cellular radio communication system 100 according to the present invention. This is achieved by the BCCFP 108 (the control node) connected to all BRFPs in the system 100.

Figure 13a illustrates a schematic block diagram of a first embodiment of a BCCFP 1301 (control node) according to the present invention. The BCCFP 1301 comprises a processor with
15 a memory 1302, a hard disk 1303 and a network interface 1304 connected to each other by a computer bus 1305. The processor with the memory is e.g. used for creating and updating the neighbouring lists and calculating realtime clock differences. The hard disk is e.g. used for storing
20 the neighbouring lists, realtime clock and identity information. The network interface 1304 is used for connecting the BCCFP to the BRFPs via a LAN 1306. All voice and data traffic is separated from the BCCFP in this embodiment and hence processed by a separate voice/data unit
25 1307 connected to the LAN 1306.

Figure 13b illustrates a schematic block diagram of a second embodiment of a BCCFP 1308 according to the present invention where the voice/data unit 1307 is integrated in the BCCFP 1308. The voice/data unit 1307 comprises a voice
30 codec and means for conversion between circuit switched and packet switched information.

Figure 14 illustrates a schematic block diagram of a BRFP 1401 (radio node) according to the present invention. The

BRFP comprises a processor with a RAM memory and a flash memory 1402, a bluetooth radio interface chip/unit 1403 and a network or serial communication interface 1404 connected to each other by a computer bus 1405. The processor with the
5 RAM memory and flash memory is e.g. used for processing and distributing realtime clock information. The bluetooth radio interface chip/unit has previously been described. The network interface is used for connecting the BRFP to a LAN according to figure 1 and the serial communication interface
10 is used if the BRFP is circuit switched connected according to figure 12.

CLAIMS

1. A method for attaching a first radio unit (101) to a cellular radio communication system (100) comprising a number of local radio networks (109,110) utilising radio
5 interfaces which, between said local radio networks (109,110), are unsynchronised with each other, where each of said local radio networks comprises a radio node (104-107) arranged to communicate with a number of radio units (101-103), and where said first radio unit (101) has to
10 make a first contact with a first radio node (105) before said first radio unit (101) is able to detect a signal from said first radio node (105),

c h a r a c t e r i s e d by the steps of:

15 establishing a link (201) between said first radio unit (101) and said first radio node (105) in a first local radio network (109), where said first radio node receives information including identification and authentication data from said first radio unit (101); and

20 establishing a connection (203-206) from said first radio node (105) to a control node (108) associated with said radio nodes (104-107) so that said first radio unit (101) becomes attached to said cellular radio communication system (100), and where said control node controls the communication in each of said local radio networks
25 (109,110).

2. A method as claimed in claim 1, wherein said step of establishing a connection (203-206) comprises the steps of:

30 forwarding (203) said identification and authentication data from said first radio node (105) to said control node (108);

identifying (204) said first radio unit (101) in said control node using said identification data;

authenticating (205) said first radio unit (101) in
said control node using said authentication data; and

registrating (206) said first radio unit (101) in said
control node so that said control node (108) can direct
5 calls to and from said first radio unit (101) in said first
local radio network (109).

3. A method as claimed in claim 1 or 2, wherein said
identification data includes at least one of the IEEE or
IMSI identities.

10 4. A method as claimed in any one of claims 1-3, wherein
each one of said radio nodes (104-107) shares one frequency
hopping channel with those radio units (101-103) that said
radio nodes are connected to in their respective local radio
network.

15 5. A method for retaining a connection to a first radio
unit (101) in a cellular radio communication system (100)
comprising a number of local radio networks (109,110)
utilising radio interfaces which, between said local radio
networks (109,110), are unsynchronised with each other, and
20 where each of said local radio networks comprises a radio
node (104-107) arranged to communicate with a plurality of
radio units (101-103),

c h a r a c t e r i s e d by the steps of:

establishing (301) a beacon signalling from said first
25 radio node (105) to said first radio unit (101) in a first
local radio network (109);

measuring (304) in a first measurement at least one
signal parameter on said beacon signal from said first radio
node (105) at said first radio unit (101) and transmitting
30 said first measurement to said first radio node in a
response signal; and

measuring (205) in a second measurement said at least one signal parameter on at least one signal from said first radio unit (101) at said first radio node (105) and forwarding said first and second measurement to a control node (108) associated with said radio nodes (104-107).

6. A method as claimed in claim 5, wherein said method further comprising the steps of:

ordering (307) neighbouring radio nodes (104, 106) to said first radio node (105) to page said first radio unit (101);

establishing (307) a beacon signalling from said neighbouring radio nodes (104, 106) to said first radio unit (101); and

measuring (307) said at least one signal parameter on signals from said first radio unit (101) at said neighbouring radio nodes (104, 106).

7. A method as claimed in claim 6, wherein said neighbouring radio nodes (104, 106) are registered in a neighbouring list (fig 5) in said control node (108), where said neighbouring list includes information of which radio nodes in said system (100) that are within radio coverage of said first radio unit (101) when said first radio unit (101) is located in said first local radio network (109).

8. A method as claimed in any one of claims 5-7, wherein each one of said radio nodes (104-107) shares one frequency hopping channel with those radio units (101-103) that said radio nodes are connected to in their respective local radio network.

9. A method as claimed in any one of claims 5-8, wherein said first and second measurement are stored in a BRFP_candidates list (fig.4) in said control node (108).

10. A method for collecting data for a neighbouring list in a cellular radio communication system (100) comprising a number of local radio networks (109,110) utilising radio interfaces which, between said local radio networks
5 (109,110), are unsynchronised with each other, and where each of said local radio networks comprises a radio node (104-107) arranged to communicate with a plurality of radio units (101-103),

c h a r a c t e r i s e d by the steps of:

10 transmitting (701) a page signal from all radio nodes (104-107) in said system (100) to a first radio unit (101) connected to a first radio node (105);

 transmitting (702) a response signal from said first radio unit (101) to said first radio node (105), where said
15 response signal includes information of which of said radio nodes (104-107) said first radio unit (101) has detected a page signal from; and

 forwarding (703) said response signal from said first radio node (105) to a control node (108) associated with
20 said radio nodes (104-107).

11. A method as claimed in claim 10, wherein said neighbouring list is created from said response signal in said control node (108) by registering said radio nodes from which said first radio unit (101) has detected a page
25 signal as neighbours to said first radio node.

12. A method as claimed in claim 10, wherein said neighbouring list in said control node (108) is updated from said response signal in said control node (108).

13. A method as claimed in any one of claim 10-12, wherein
30 said response signal also includes information of at least one signal parameter measured by said first radio unit on said detected page signals from said radio nodes (104-107).

14. A method for calculating the realtime clock of a first radio node (105) in a second radio node (106) in a cellular radio communication system (100) comprising a number of local radio networks (109,110) utilising radio interfaces which, between said local radio networks (109,110), are unsynchronised with each other, where each of said local radio networks comprises a radio node (104-107) arranged to communicate with a plurality of radio units (101-103), and where a link is established between a first radio unit (102) and both of said first and second radio nodes (105,106),

c h a r a c t e r i s e d by the steps of:

generating (901-905) a first BRFP realtime clock difference between the realtime clocks of said first radio node and said second radio node in a control node (108) associated with said radio nodes (104-107);

transmitting (907) said first BRFP realtime clock difference to said second radio node (106); and

calculating (908) the real time clock of said first radio node (105) in said second radio node (106) by adding said first BRFP realtime clock difference to the realtime clock of said second radio node (106).

15. A method as claimed in claim 14, wherein said step of generating a first BRFP realtime clock difference comprises the steps of:

calculating (901) a first realtime clock difference between said first radio unit (101) and said first radio node (105) in said first radio node;

transmitting (902) said first realtime clock difference to said control node (108);

calculating (903) a second realtime clock difference between said first radio unit (101) and said second radio node (106) in said second radio node;

transmitting (904) said second realtime clock
difference to said control node (108);

calculating (905) said first BRFP realtime clock
difference in said control unit from said first and second
5 realtime clock difference.

16. A method as claimed in claim 14 or 15, wherein said
step of calculating (908) the realtime clock of said first
radio node (105) in said second radio node (106) is followed
by the step of:

10 paging a second radio unit (101) from said second radio
node (106), where said second radio unit (101) has
established a link to said first radio node (105).

17. A method for co-ordinating the use of time slots in
different local radio networks (109,110) in a cellular radio
15 communication system (100) comprising a number of local
radio networks (109,110) utilising radio interfaces which,
between said local radio networks (109,110), are
unsynchronised with each other and having at least three
timeslots, and where each of said local radio networks
20 comprises a radio node (104-107) arranged to communicate
with a plurality of radio units (101-103),

c h a r a c t e r i s e d by the steps of:

generating (1001-1003) a BRFP realtime clock difference
between all the realtime clocks of said radio nodes (104-
25 107) in said system (100) in a control node (108) associated
with said radio nodes (104-107);

selecting (1004) the realtime clock of a first one of
said radio nodes (104) as a reference clock for all radio
nodes (104-107) in said system (100);

30 ordering (1105) all radio nodes (104-107) in said
system to use timeslots co-ordinated with said reference

clock of said first radio node (104) for signalling and payload by using said BRFP realtime clock differences.

18. A method as claimed in claim 17, wherein said step of generating a BRFP realtime clock difference between all the
5 realtime clocks of said radio nodes (104-107) comprises the steps of:

calculating (1001) realtime clock differences in all radio nodes (104-107) between their own realtime clocks and said radio units (101-103) which they are connected too;
10 transmitting (1002) said realtime clock differences to said control node (108);
calculating (1003) said BRFP realtime clock difference from said calculated realtime clock difference in said control node (108).

15 19. A cellular radio communication system comprising a number of local radio networks (109,110) utilising radio interfaces which, between said local radio networks (109,110), are unsynchronised with each other, where each of said local radio networks comprises a radio node (104-107)
20 arranged to communicate with a plurality of radio units (101-103), and where a first radio unit (101) has to make a first contact with a first radio node (105) before said first radio unit (101) is able to detect a signal from said first radio node (105),

25 c h a r a c t e r i s e d by that the system comprises:

means for establishing a link between said first radio unit (101) and said first radio node (105) in a first local radio network (109);

means for establishing a connection from said first
30 radio node (105) to a control-node (108) associated with said radio nodes (104-107), and where said control node is arranged to control the communication in each of said local radio networks (109,110).

20. A cellular radio communication system as claimed in claim 19, wherein said system further provides:

means for identifying, authenticating and registering said first radio unit (101) in said control node so that
5 said control node (108) can direct calls to and from said first radio unit (101) in said first local radio network (109).

21. A cellular radio communication system as claimed in claim 19 or 20, wherein said system further provides:

10 means for roaming said link to said first radio unit (101) between said radio nodes (104-107) in said system (100).

22. A cellular radio communication system as claimed in any one of claims 19-21, wherein said system further provides:

15 means for performing handovers of said connection to said first radio unit (101) between said radio nodes (104-107) in said system (100).

23. A cellular radio communication system as claimed in any one of claims 19-22, wherein said system further provides:

20 means for registering neighbouring radio nodes (104, 106) to said first radio node (105) in a neighbouring list (fig 5) in said control node (108), where said neighbouring radio nodes are those radio nodes in said system (100) that are within radio coverage of said first radio unit (101)
25 when said first radio unit (101) is located in said first local radio network (109).

24. A cellular radio communication system as claimed in any one of claims 19-23, wherein each one of said radio nodes (104-107) are arranged to share one frequency hopping
30 channel with those radio units (101-103) that said radio nodes are connected to in their respective local radio network.

25. A control node in a cellular radio communication system comprising a number of local radio networks (109,110) utilising radio interfaces which, between said local radio networks (109,110), are unsynchronised with each other, and
5 where each of said local radio networks comprises a radio node (104-107) arranged to communicate with a plurality of radio units (101-103),
c h a r a c t e r i s e d in that said control node (108) is connected to at least one radio node (104-107) in each
10 local radio network (109,110) in said system (100) so as to create a cellular radio communication system out of said local radio networks (109,110), and where said control node is arranged to control the communication in each of said local radio networks (109,110).
- 15 26. A control node as claimed in claim 25, wherein said control node comprises means for establishing a connection from each one of said radio nodes (104-107) to said control-node (108).
- 20 27. A control node as claimed in claim 25 or 26, wherein said control node comprises means for identifying (204), authenticating (205) and registrating (206) each one of said radio units (101-103) so that said control node (108) can direct calls to and from said radio units (101-103).
- 25 28. A control node as claimed in any one of claims 25-27, wherein said control node comprises means for roaming links to radio units (101-103) between said radio nodes (104-107) in said system (100).
- 30 29. A control node as claimed in any one of claims 25-28, wherein said control node comprises means for performing handovers of connections to said radio units (101-103) between said radio nodes (104-107) in said system (100).

30. A control node as claimed in any one of claims 25-29,
wherein said control node comprises means for generating
(1001-1003) a BRFP realtime clock difference between all the
realtime clocks of said radio nodes (104-107) in said system
5 (100).

31. A control node as claimed in any one of claims 25-30,
wherein said control node comprises:

means for selecting (1004) the realtime clock of a
first one of said radio nodes (104) as a reference clock for
10 all radio nodes (104-107) in the system (100); and

means for ordering (1105) all radio nodes (104-107) in
said system to use timeslots co-ordinated with said
reference clock of said first radio node (104) for
signalling and payload.

15 32. A control node as claimed in any of claims 25-31,
wherein said control node comprises:

means for creating a neighbouring list by registering
said radio nodes from which said first radio unit (101) can
detect a signal as neighbours to said first radio node
20 (105).

1/12

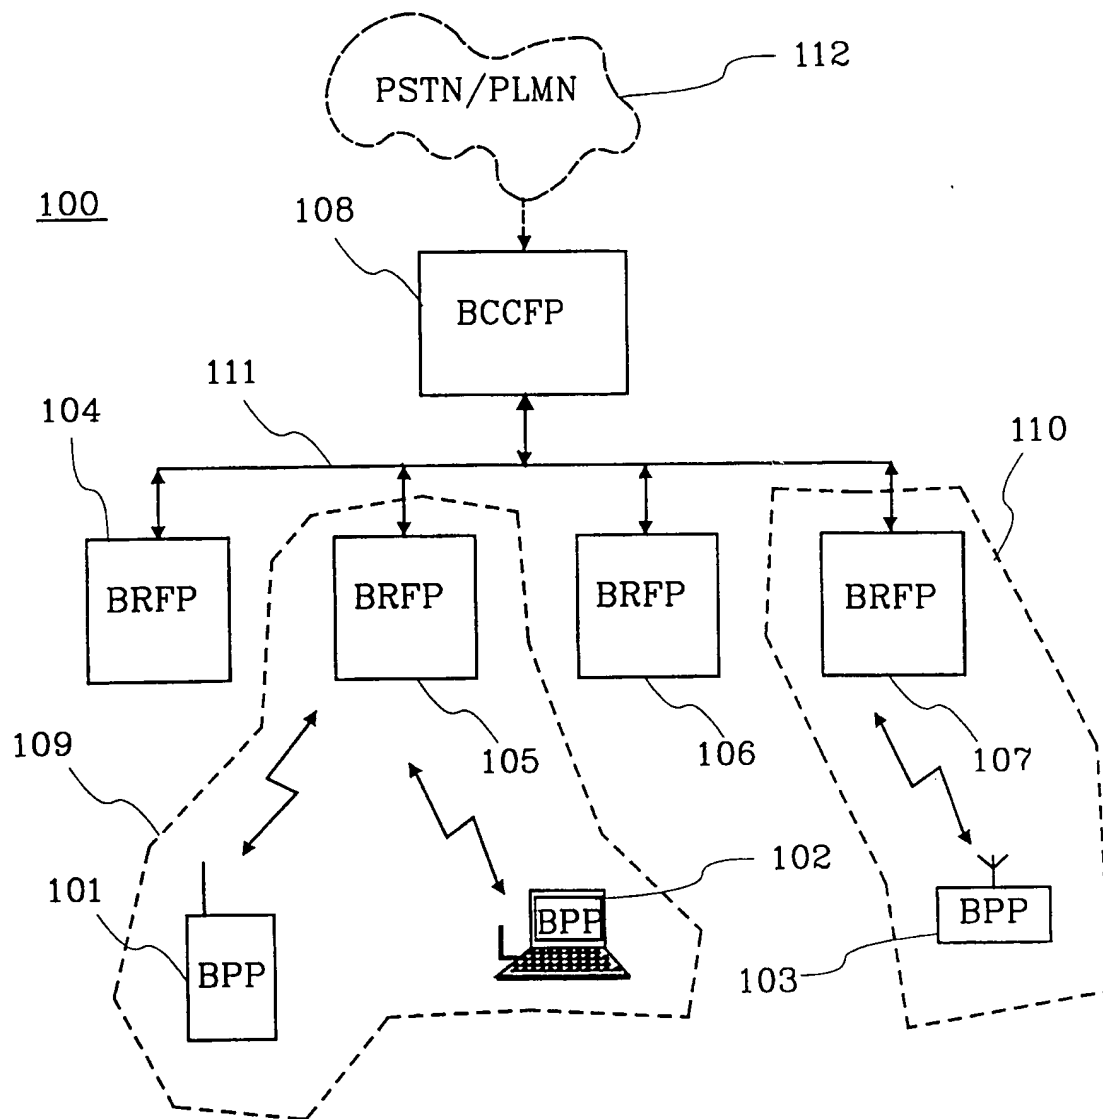


Fig.1

2/12

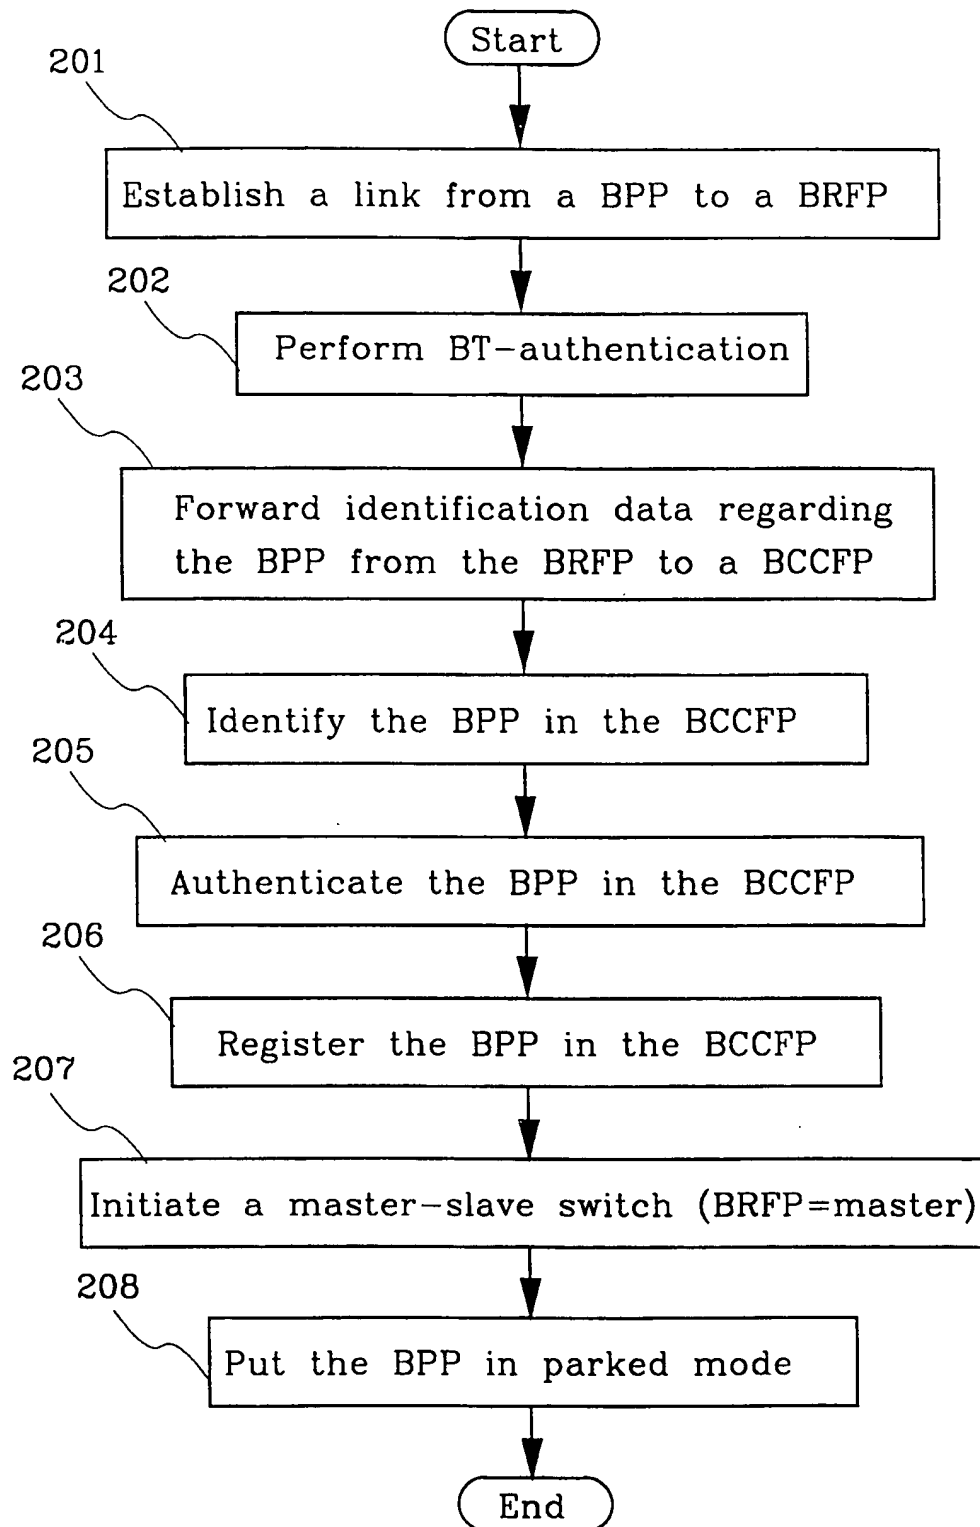


Fig.2

3/12

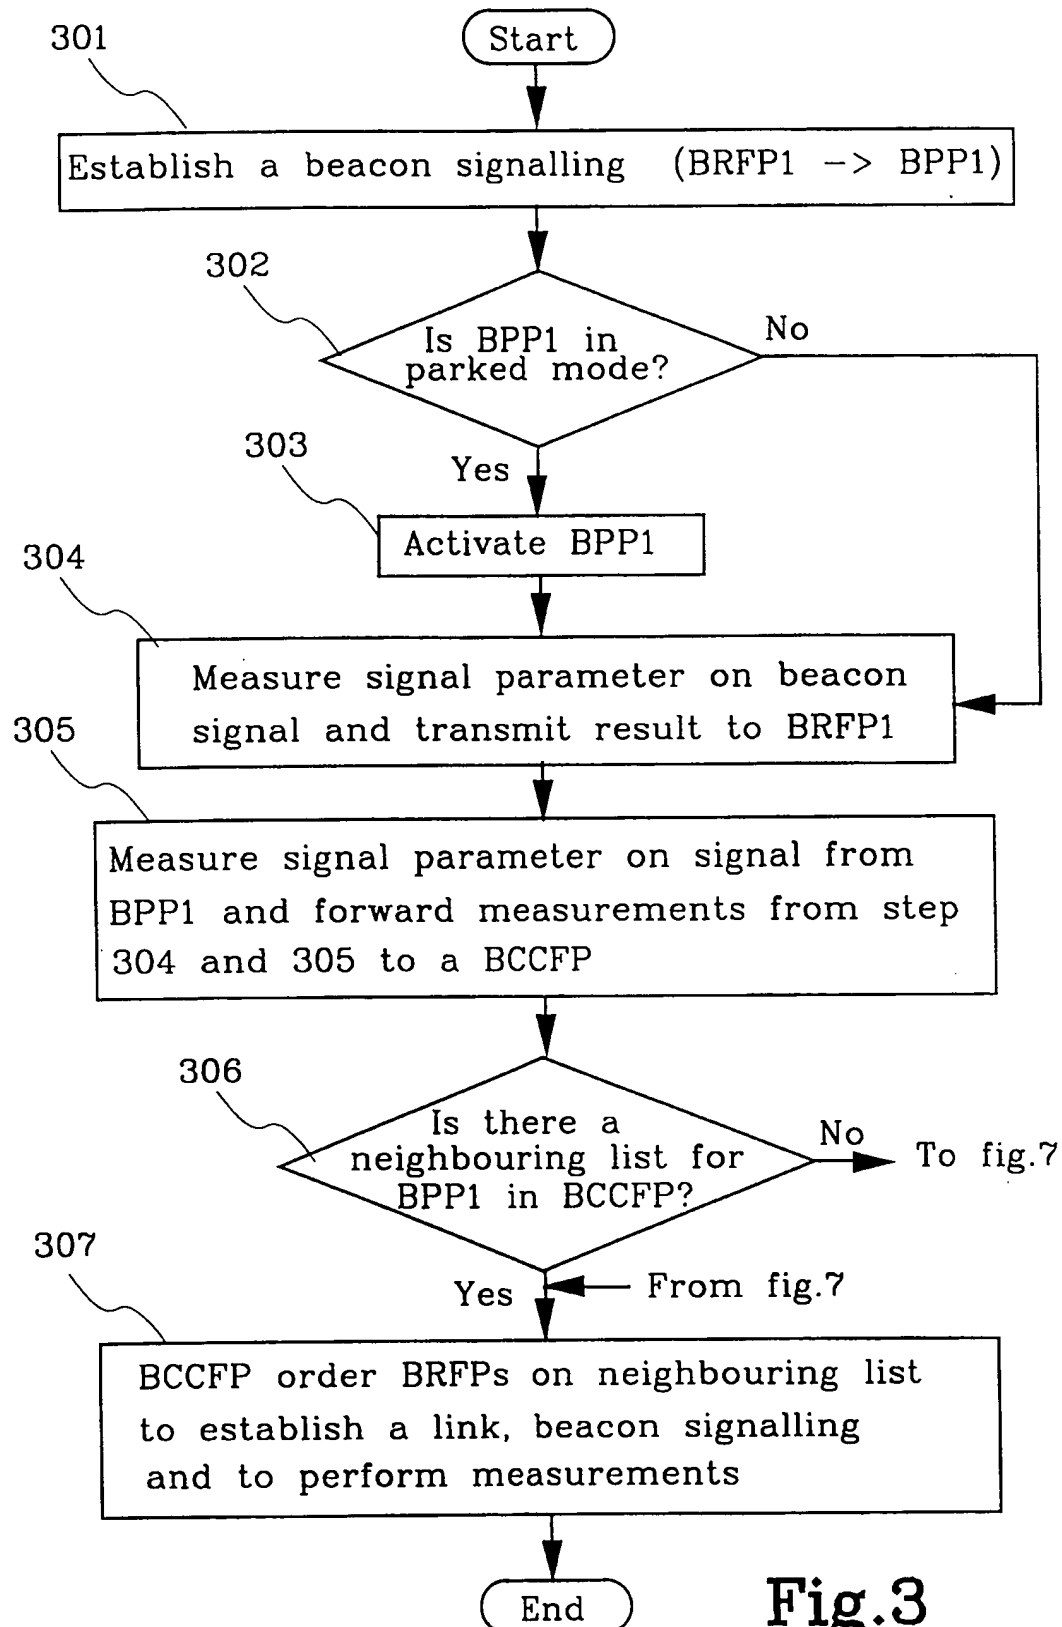


Fig.3

4/12

Current BPP	Candidates	Signal strength
BPP 101	BRFP 104	5
	BRFP 105	2
	BRFP 106	1

Fig.4

Current BRFP	Neighbouring BRFP
BRFP 105	BRFP 104
	BRFP 106

Fig.5

5/12

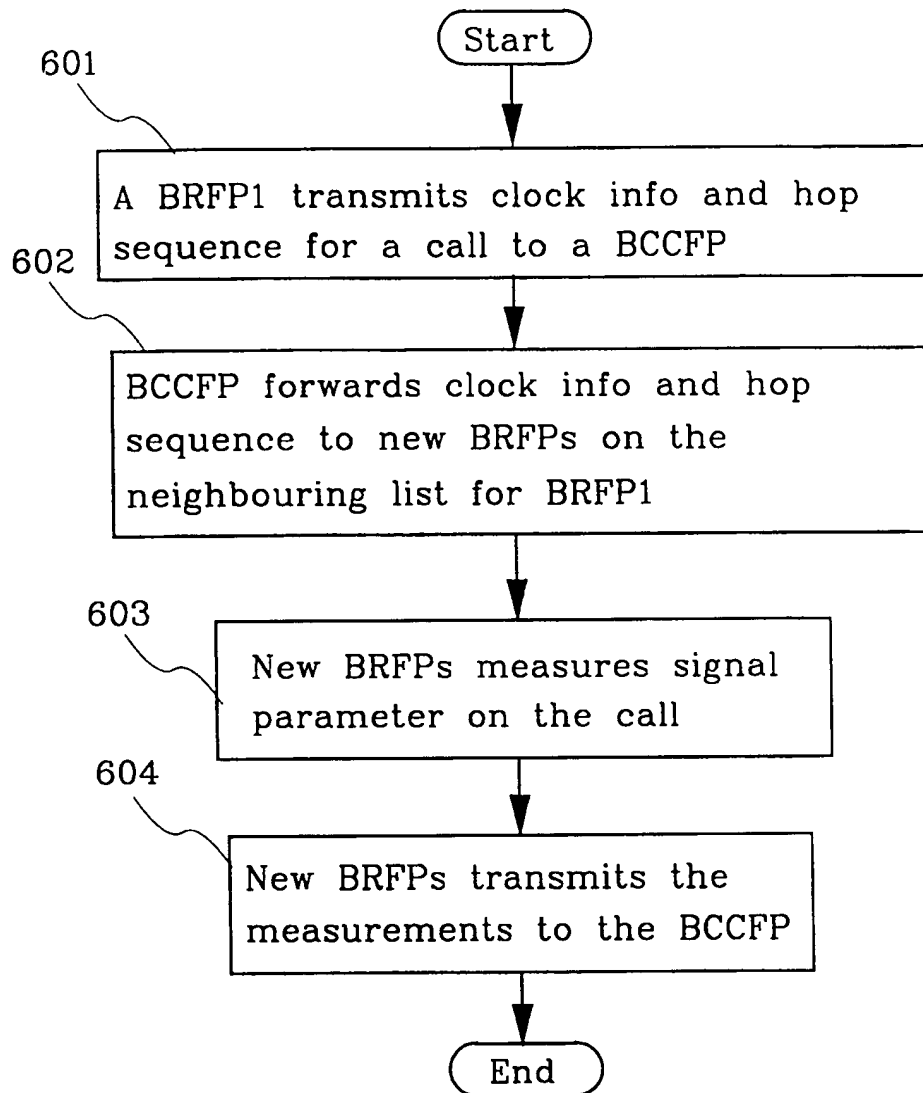


Fig.6

6/12

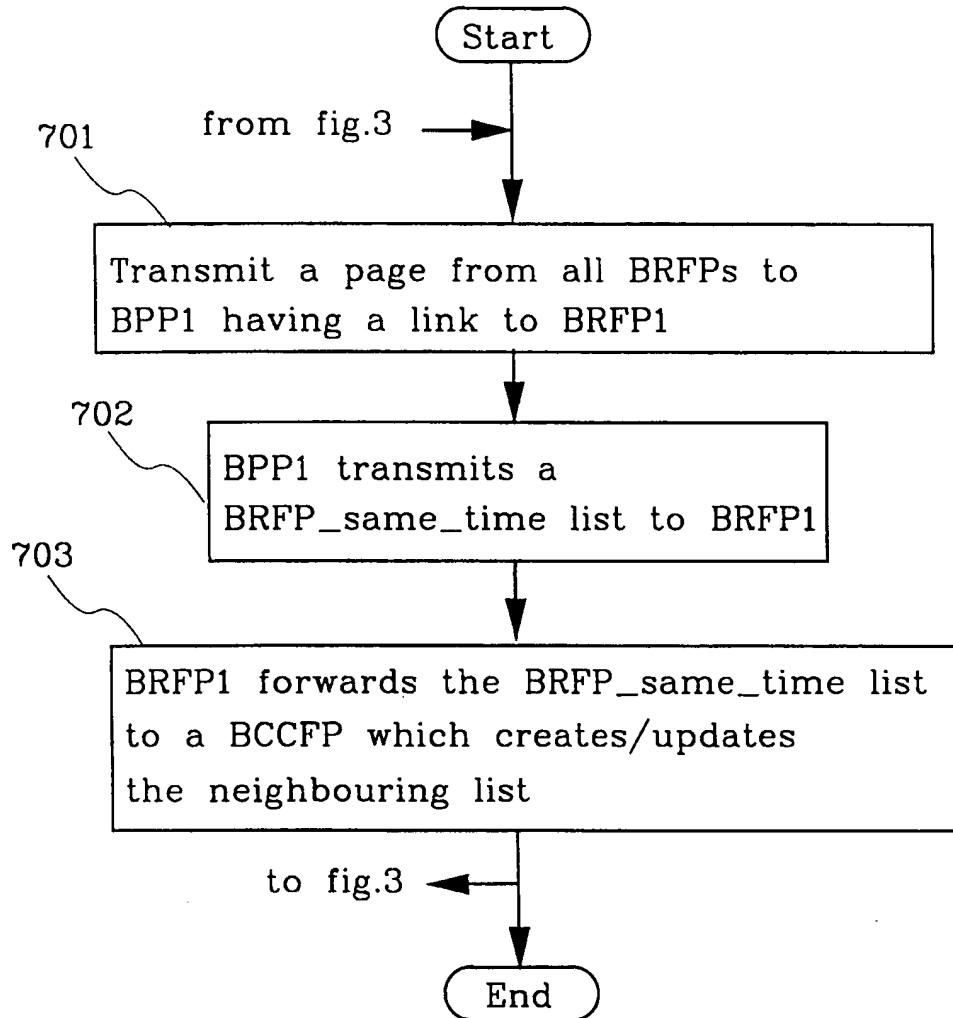


Fig.7

7/12

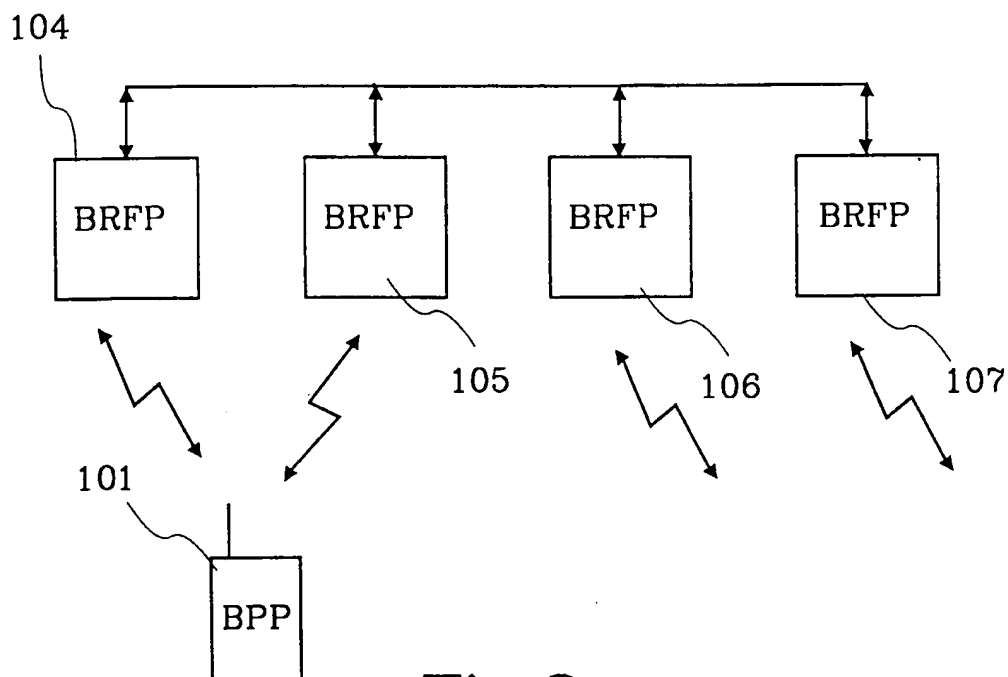


Fig.8a

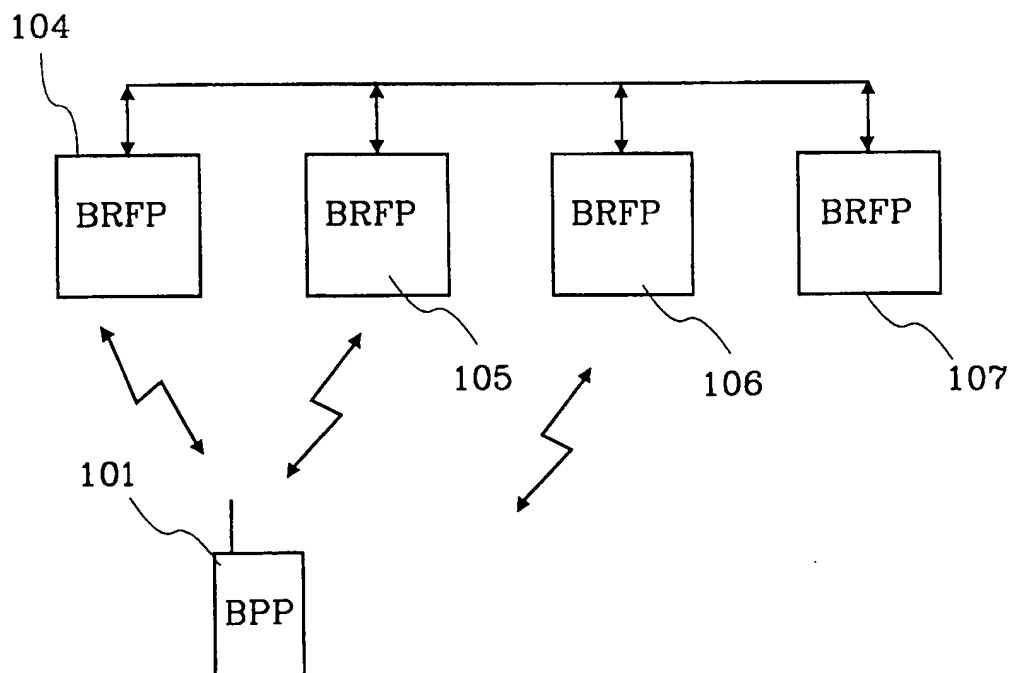


Fig.8b

8/12

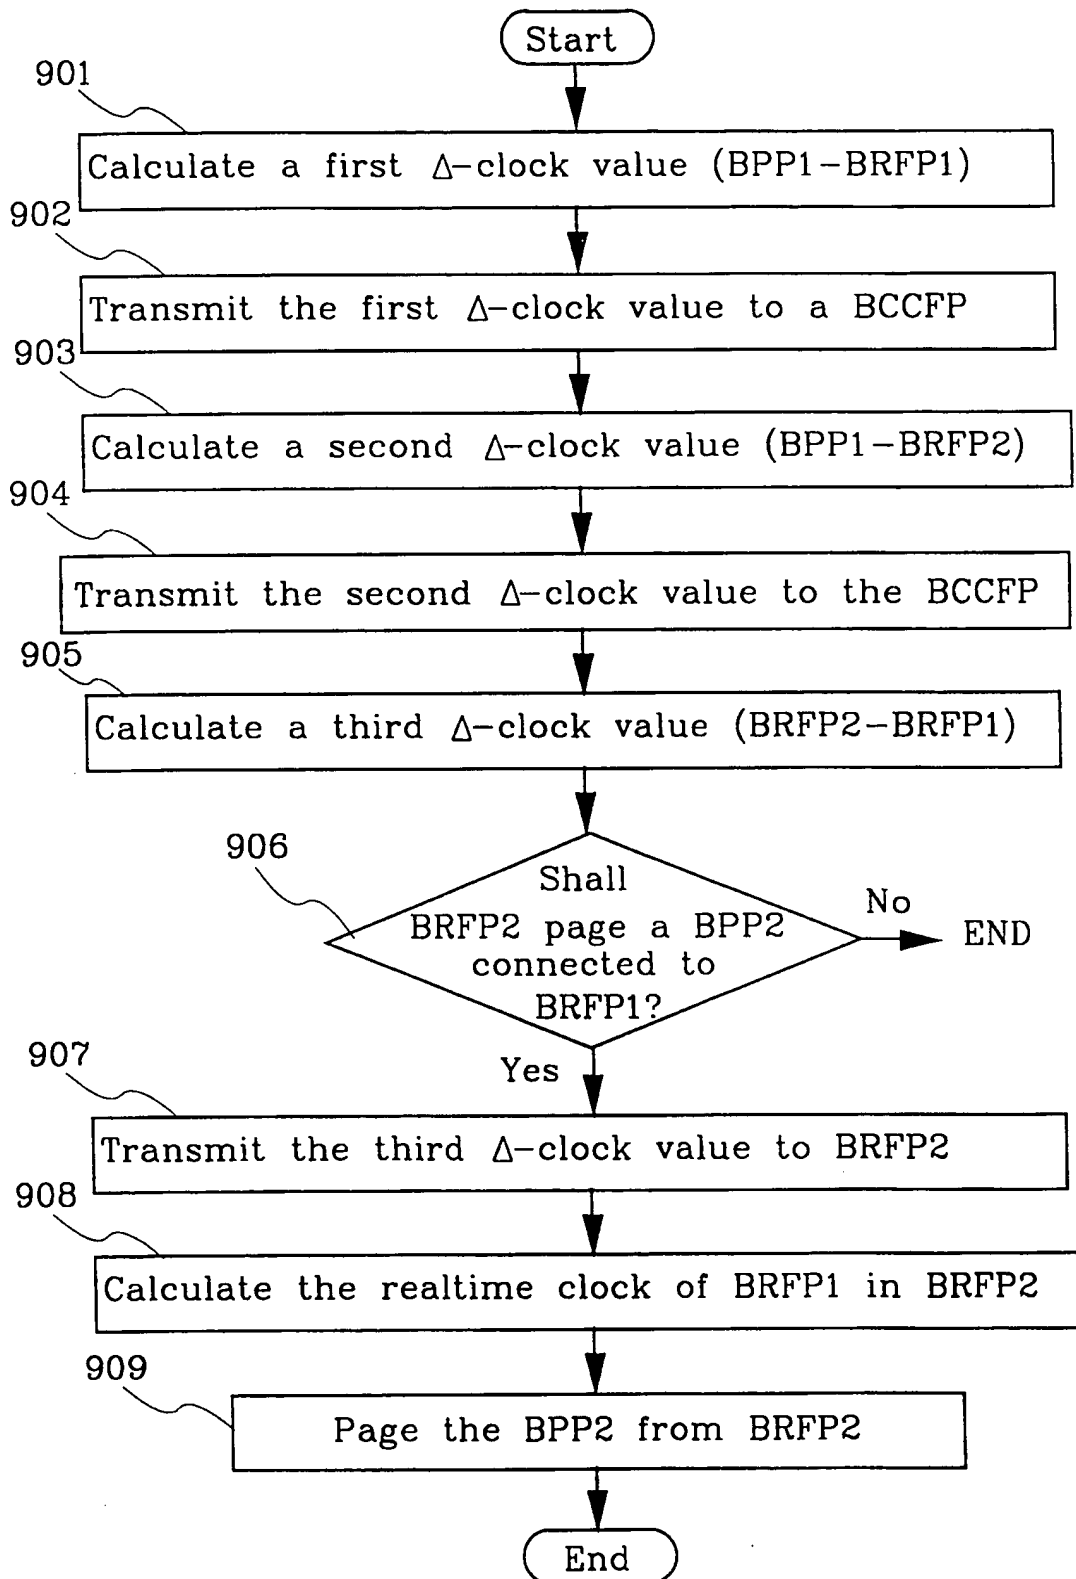


Fig.9

9/12

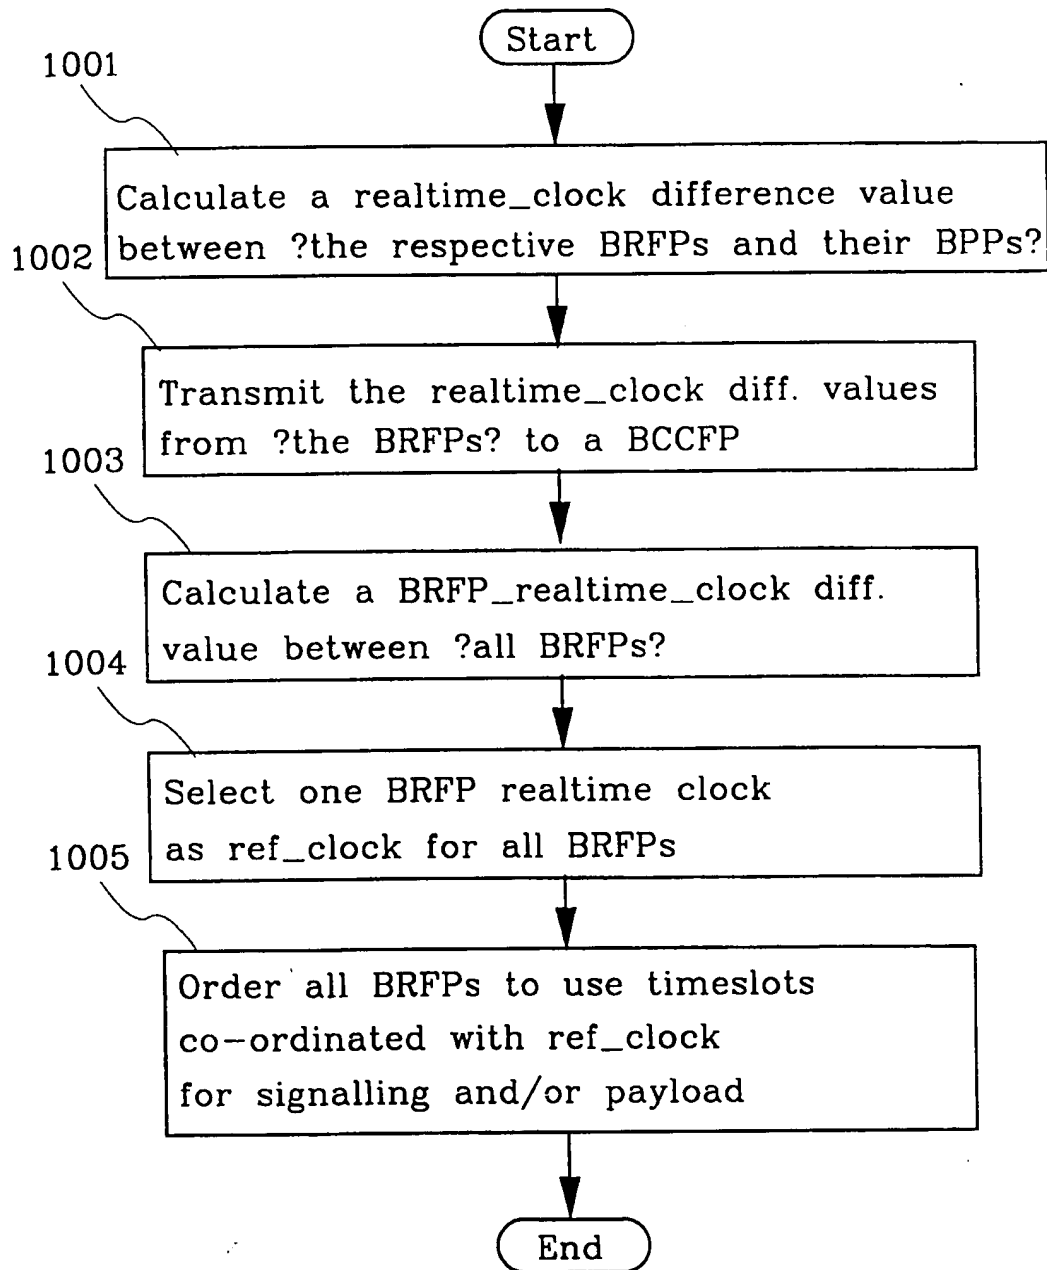


Fig.10

10/12

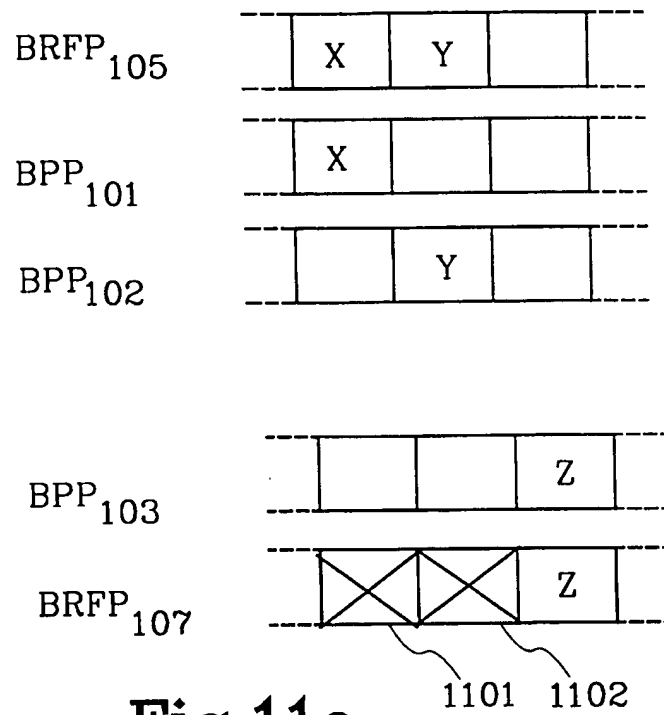


Fig.11a

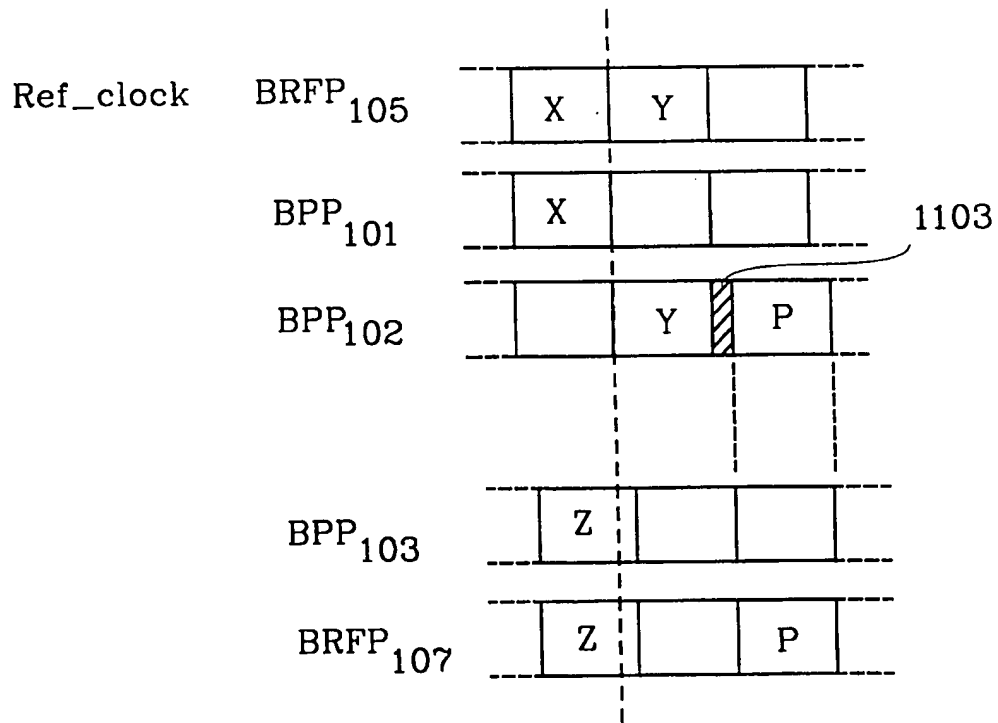


Fig.11b

11/12

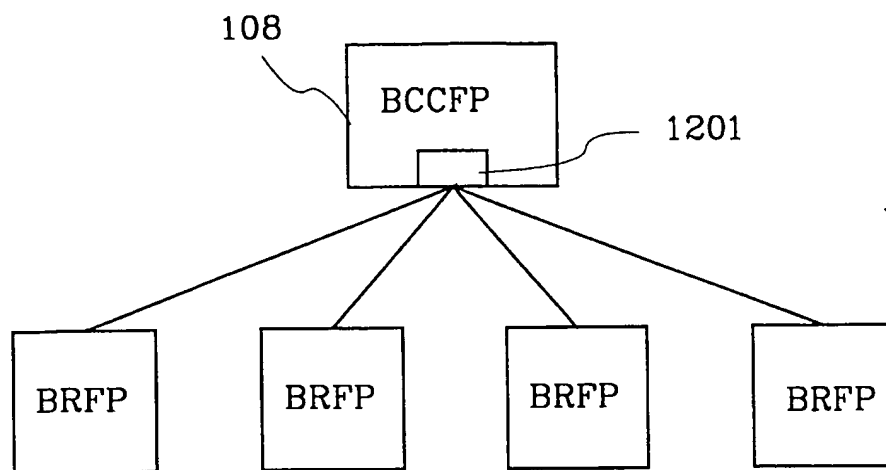


Fig.12

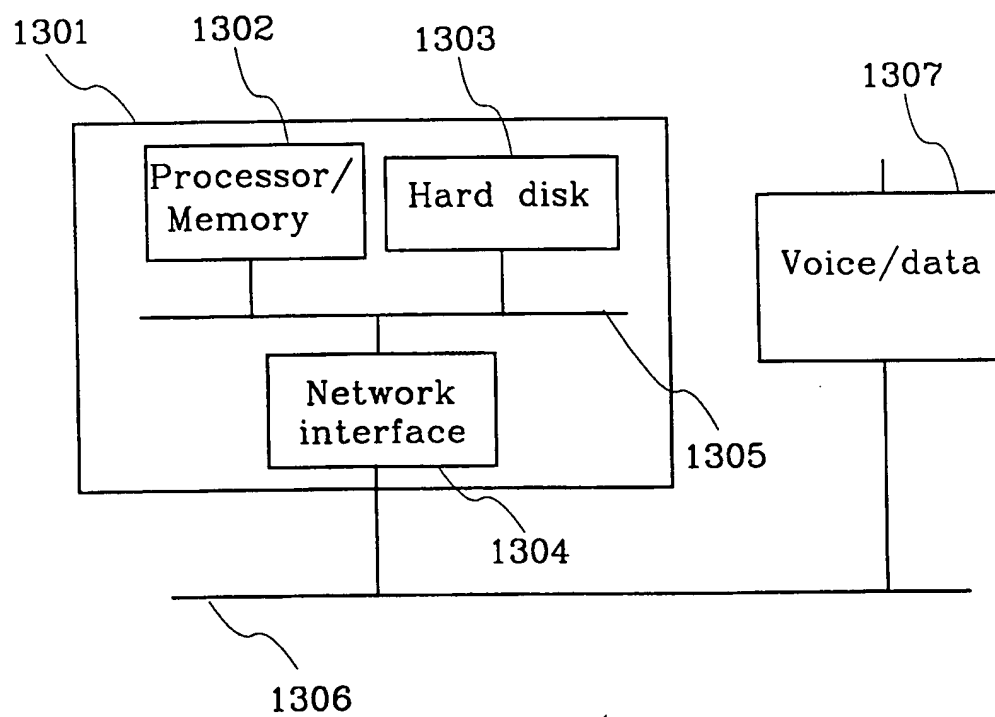


Fig.13a

12/12

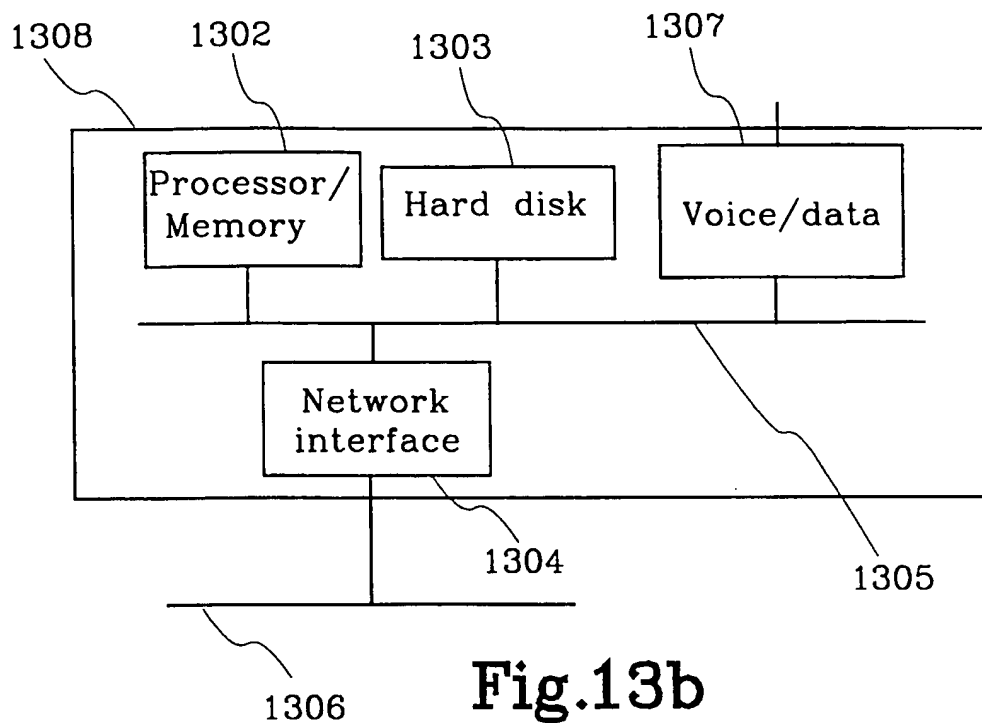


Fig.13b

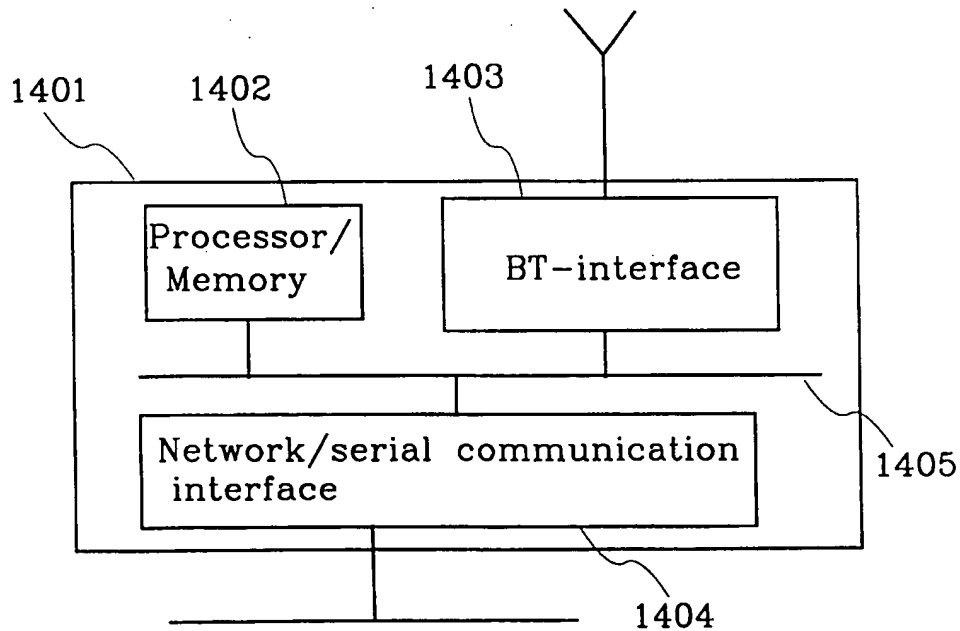


Fig.14

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00646

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9641426 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 19 December 1996 (19.12.96), page 4, line 35 - page 8, line 15 --	1-32
A	WO 9530285 A1 (AUDIOPACK SOUND SYSTEMS, INC.), 9 November 1995 (09.11.95), abstract -- -----	1-32

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 July 2000

Date of mailing of the international search report

2000-07-24

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. + 46 8 666 02 86

Authorized officer

Stefan Hansson/ipn

Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/SE 00/00646

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9641426 A1	19/12/96	AU 6020396 A	30/12/96
		BR 9609224 A	11/05/99
		CA 2223580 A	19/12/96
		CN 1192303 A	02/09/98
		EP 0830743 A	25/03/98
		JP 11506592 T	08/06/99
		NO 975671 A	03/02/98
		US 5890074 A	30/03/99
<hr/>			
WO 9530285 A1	09/11/95	EP 0772917 A	14/05/97
		US 5566362 A	15/10/96
<hr/>			